

Here is the most
up-to-date version
of the installation
VIDEO



Here is the most
up-to-date version
of the installation
GUIDE



INSTALLATION GUIDE

ROUND BALUSTERS 26" - 32" - 36"

17126-27-32-33-36-37



Got a question? - Contact us:


First contact our friendly customer service team for assistance.

Email: info@pylex.com or phone: 1-800-264-1881

Monday to Friday: 8:30 am to 4:30 pm (EST)

Replacement for damaged or missing parts will be shipped promptly.

Rev.: 52-0529




DECK AND FENCE HARDWARE
WWW.PYLEX.COM / 1 800-264-1881


NOTE: FOR STAIR RAILING, PRODUCT #17162 IS REQUIRED AND NOT INCLUDED.

MATERIALS and TOOLS REQUIRED

17126 - 17132 - 17136

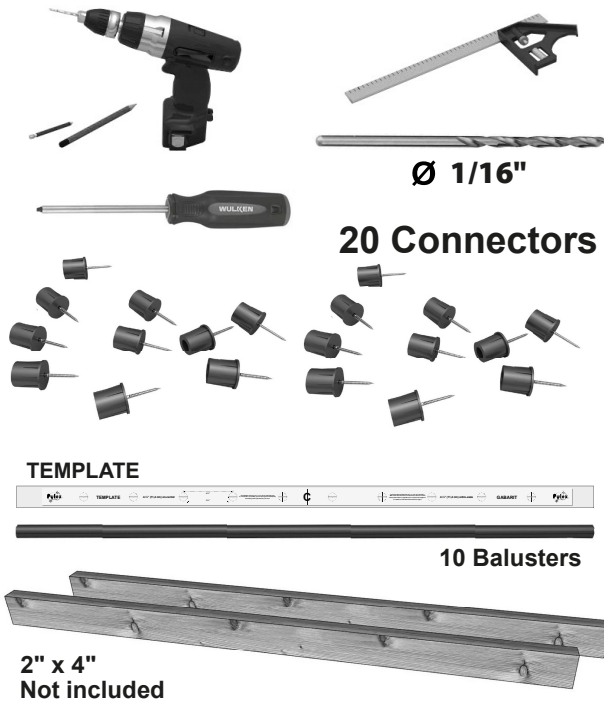

17127 - 17133 - 17137

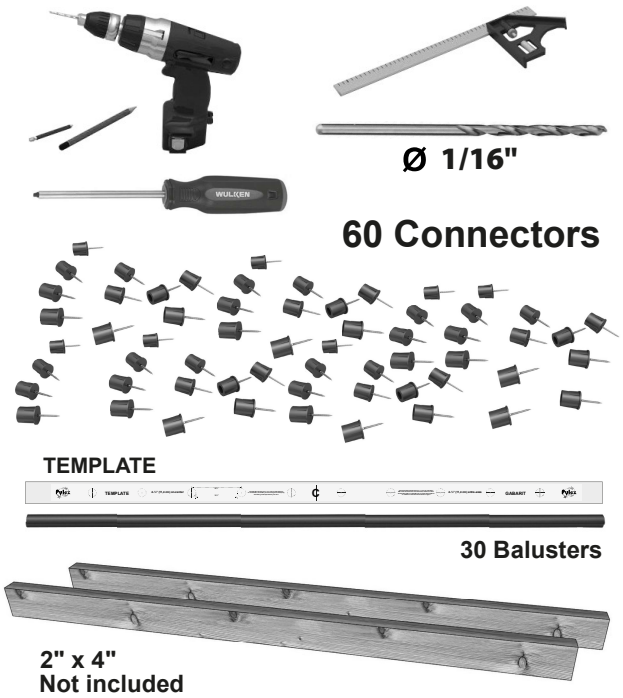

NUMBER OF BALUSTERS REQUIRED




DISTANCE		BALUSTERS
FROM	TO	
75- ³ / ₄ "	71- ¹ / ₂ "	16
71- ¹ / ₄ "	67"	15
66- ³ / ₄ "	62- ¹ / ₂ "	14
62- ¹ / ₄ "	58"	13
57- ³ / ₄ "	53- ¹ / ₂ "	12
53- ¹ / ₄ "	49"	11
48- ³ / ₄ "	44- ¹ / ₂ "	10
44- ¹ / ₄ "	40"	9

DISTANCE		BALUSTERS
FROM	TO	
39- ³ / ₄ "	35- ¹ / ₂ "	8
35- ¹ / ₄ "	31"	7
30- ³ / ₄ "	26- ¹ / ₂ "	6
26- ¹ / ₄ "	22"	5
21- ³ / ₄ "	17- ¹ / ₂ "	4
17- ¹ / ₄ "	13"	3
12- ³ / ₄ "	8- ¹ / ₂ "	2
8- ¹ / ₄ "	4"	1


STEP 1 - INSTALLATION ON THE RAILING



MEASURE THE DISTANCE
BETWEEN POSTS

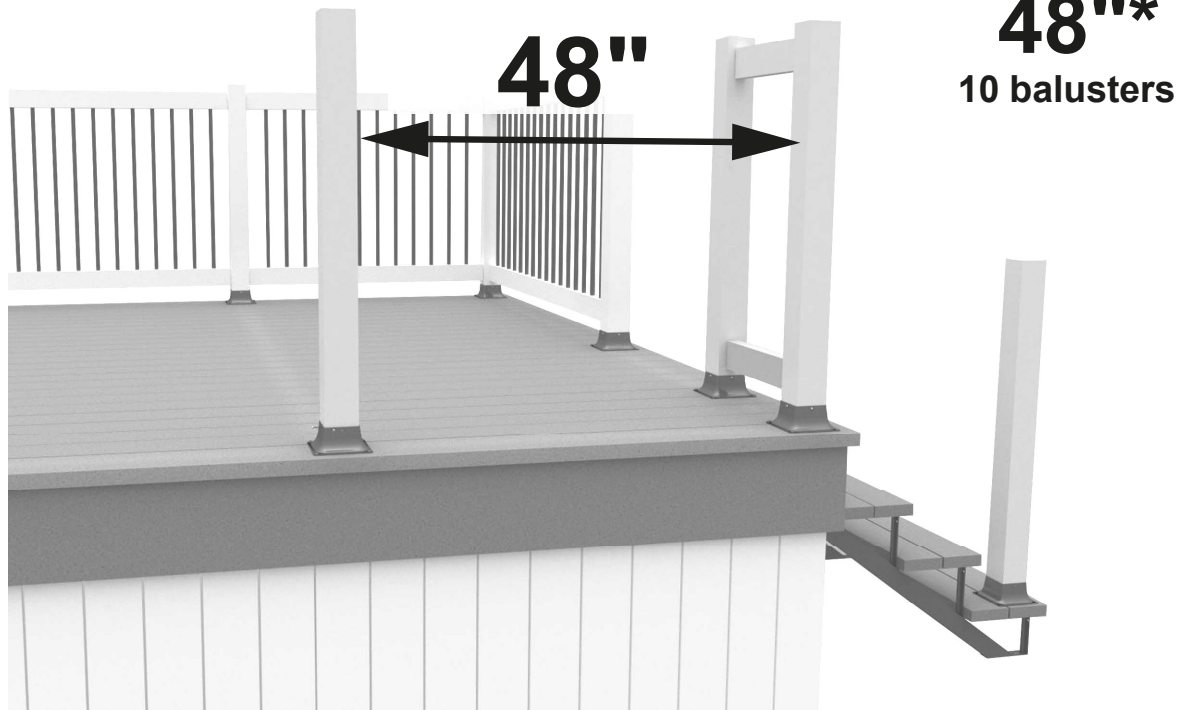


USE TWO 2" X 4" PIECES LONGER THAN
THE FINAL MEASUREMENT (50")*

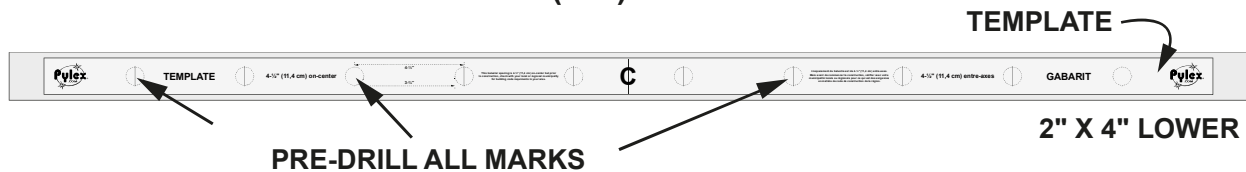

USE A SQUARE TO DRAW A
LINE ON THE TOP 2" X 4"



PRE-DRILL ALL MARKS ON THE
TOP 2" X 4"

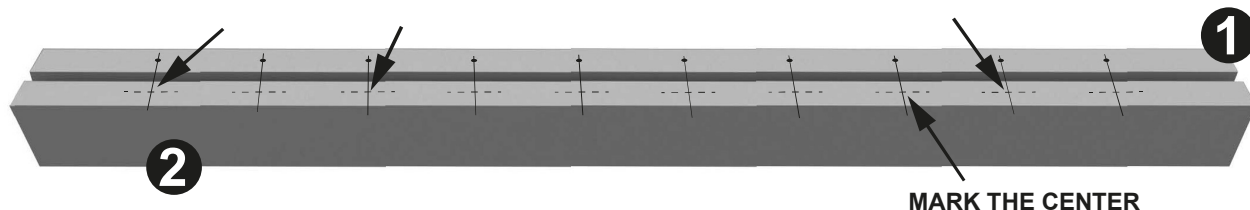

MARK THE CENTER

*USE YOUR MEASUREMENTS

STEP 2 - INSTALLATION ON THE RAILING





No 2

CONNECTORS



SCREW THE CONNECTORS
INTO THE PRE-DRILLED HOLES

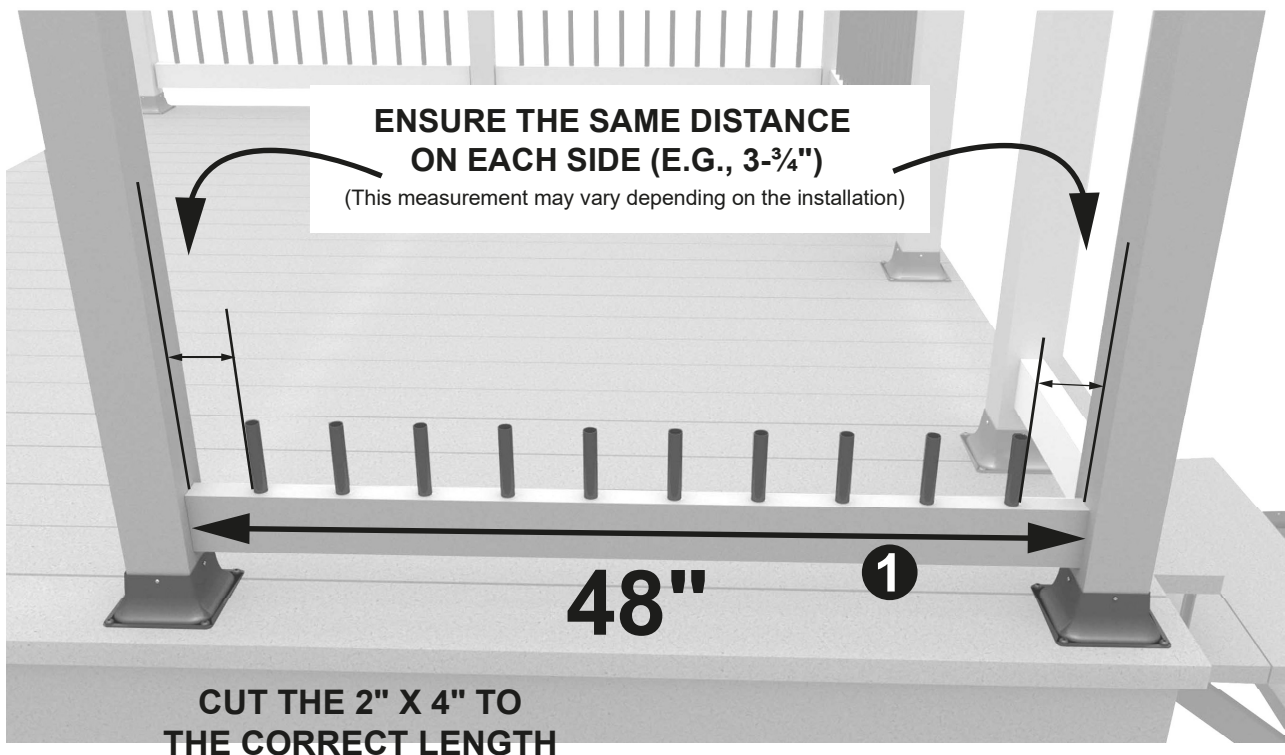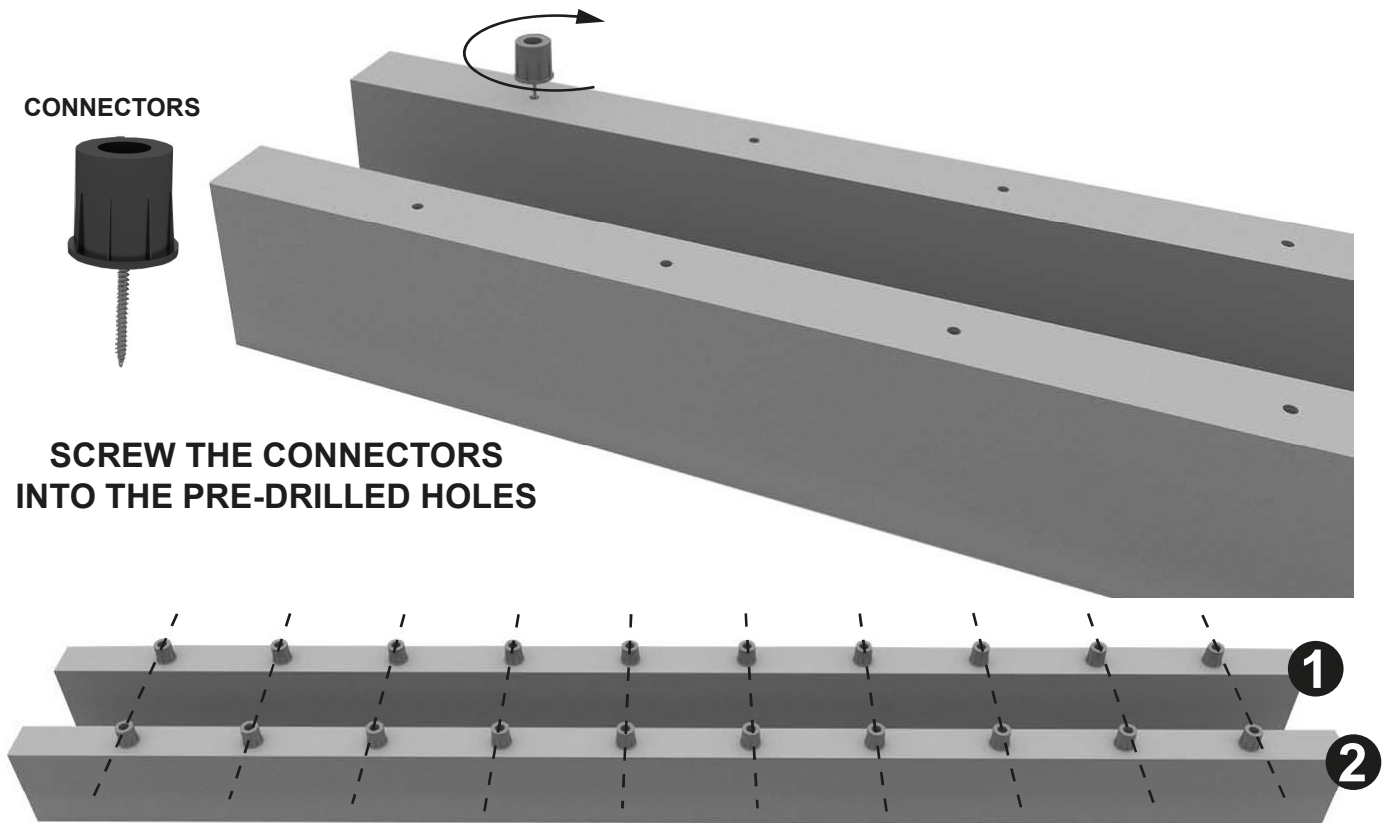

STEP 3 - INSTALLATION ON THE RAILING




ASSEMBLE THE BALUSTERS AS SHOWN

FIX
THE LOWER
RAILING TO
THE POSTS

AND PLACE THE
BALUSTERS IN THE
CONNECTORS AS
ILLUSTRATED.

1

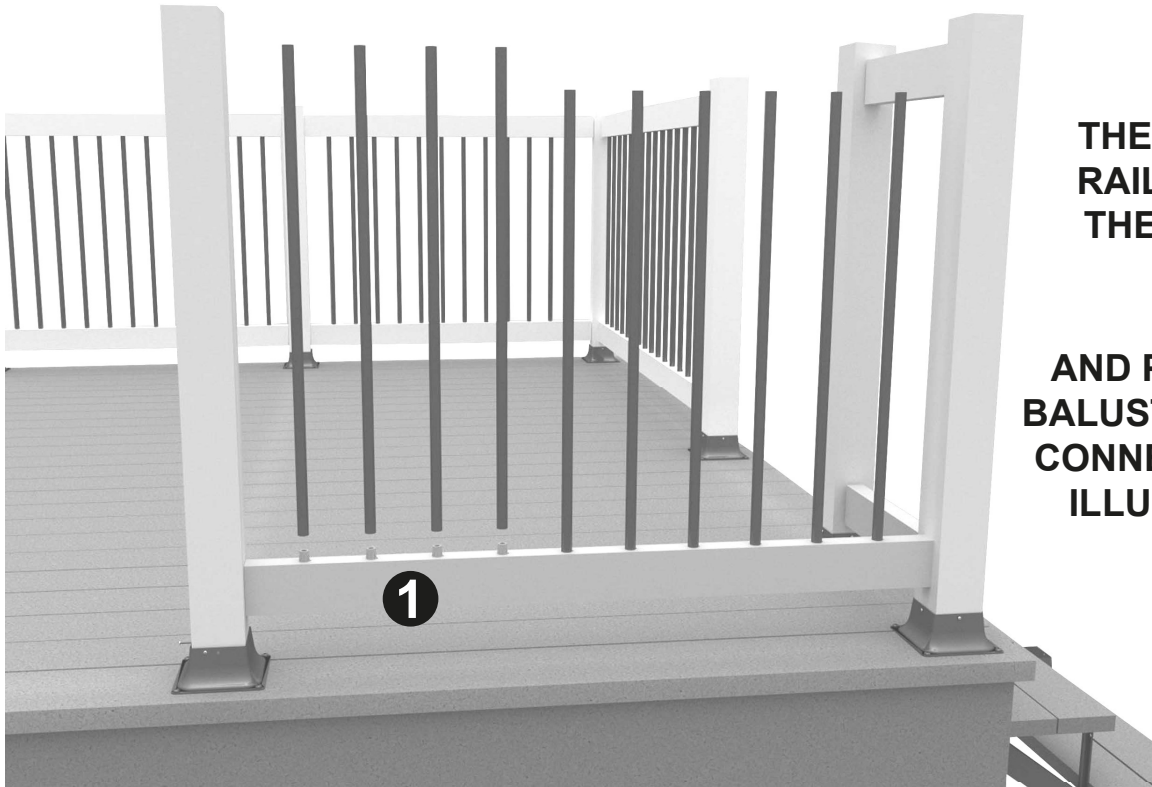


INSTALLATION TYPES
MAY VARY

MAXIMUM
DISTANCE
BETWEEN
BALUSTERS
IS 3-⁷/₈"
(WE USE 3-³/₄")

FIX THE
RAILING TO
THE POSTS

2

INSTALL THE UPPER RAILING INTO
THE ALREADY INSTALLED BALUSTERS

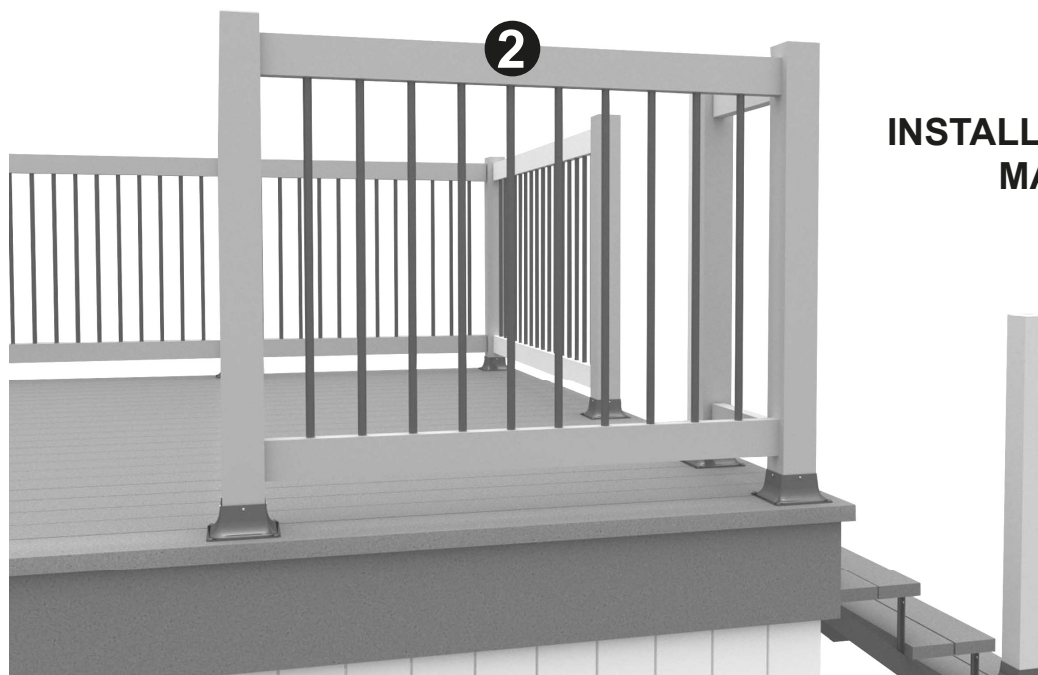


STEP 4 - INSTALLATION ON STAIR HANDRAIL



MEASURE THE DISTANCE
BETWEEN POSTS

47-1/2"*

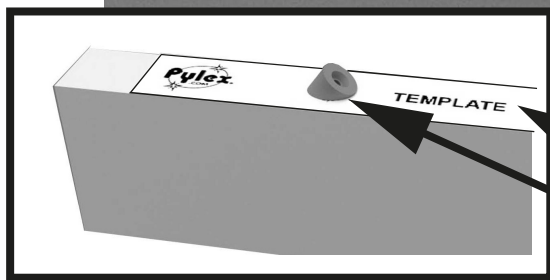

TEMPLATE

PLACE THE CONNECTORS
IN THE CENTER OF THE MARKS



Ø 1/16"

USE TWO 2" X 4" LONGER THAN
THE FINAL MEASUREMENT (52")*


TEMPLATE



2" X 4" LOWER

1


USE A SQUARE TO DRAW A
LINE ON THE TOP 2" X 4"

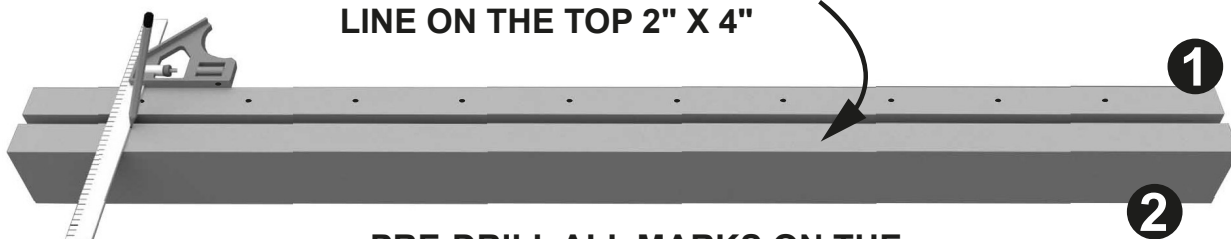

1

2

PRE-DRILL ALL MARKS ON THE
TOP 2" X 4"

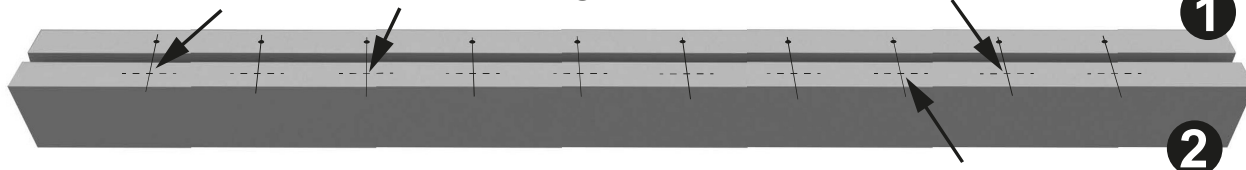



1

2




MARK THE CENTER

*USE YOUR MEASUREMENTS

STEP 5 - INSTALLATION ON STAIR HANDRAIL

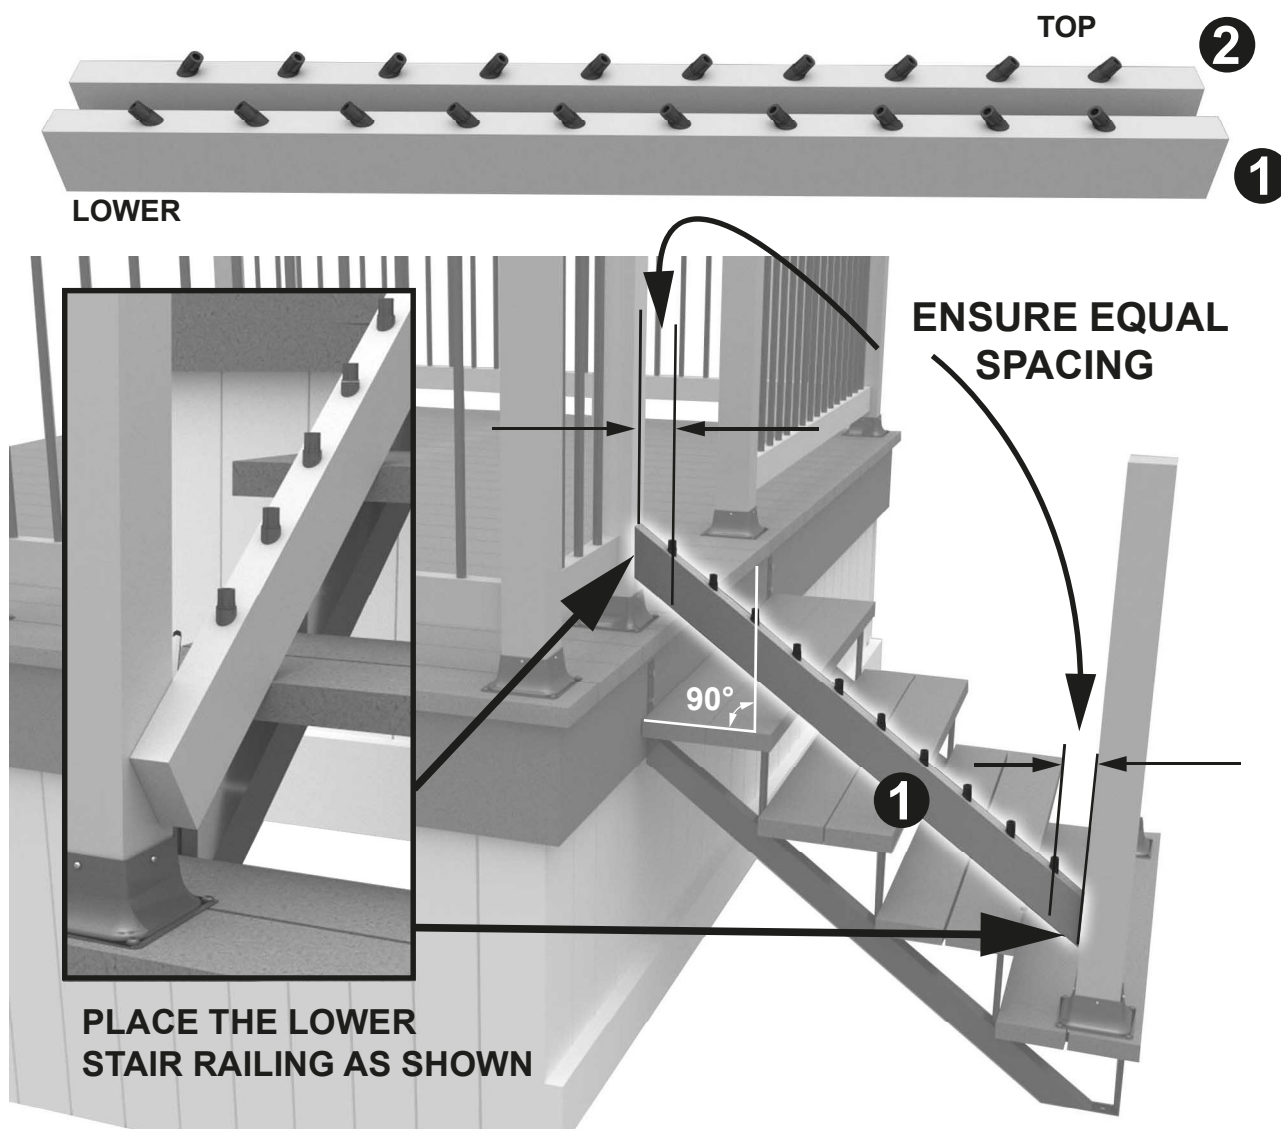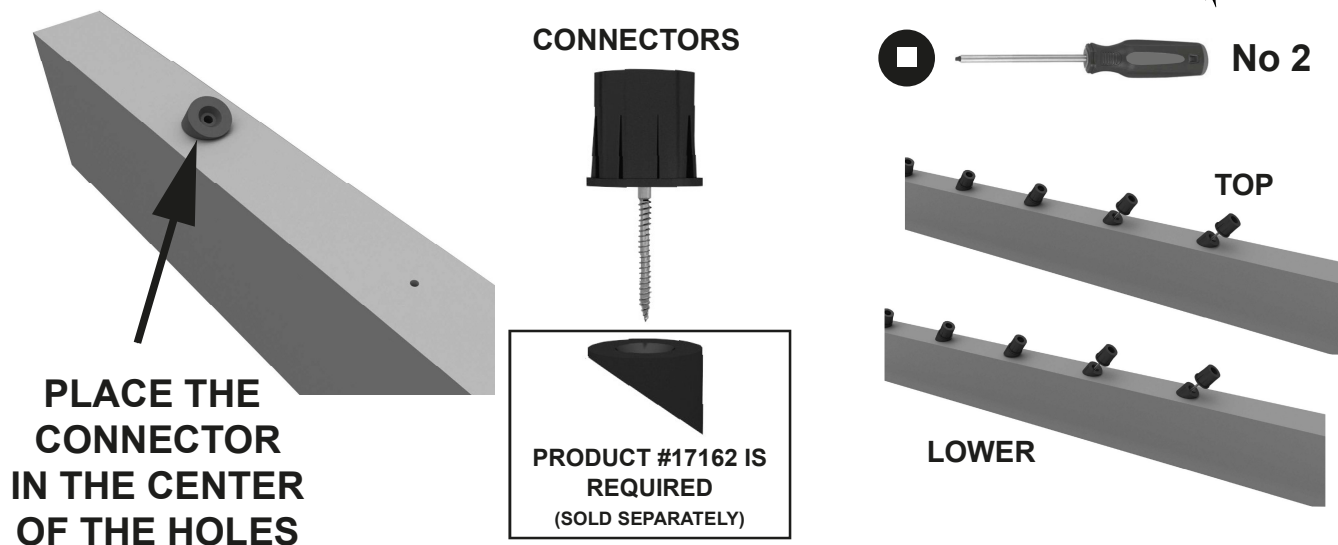



STEP 6 - INSTALLATION ON STAIR HANDRAIL

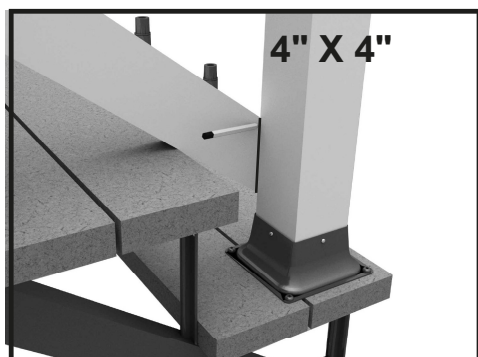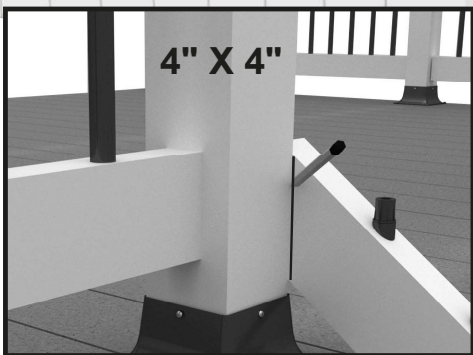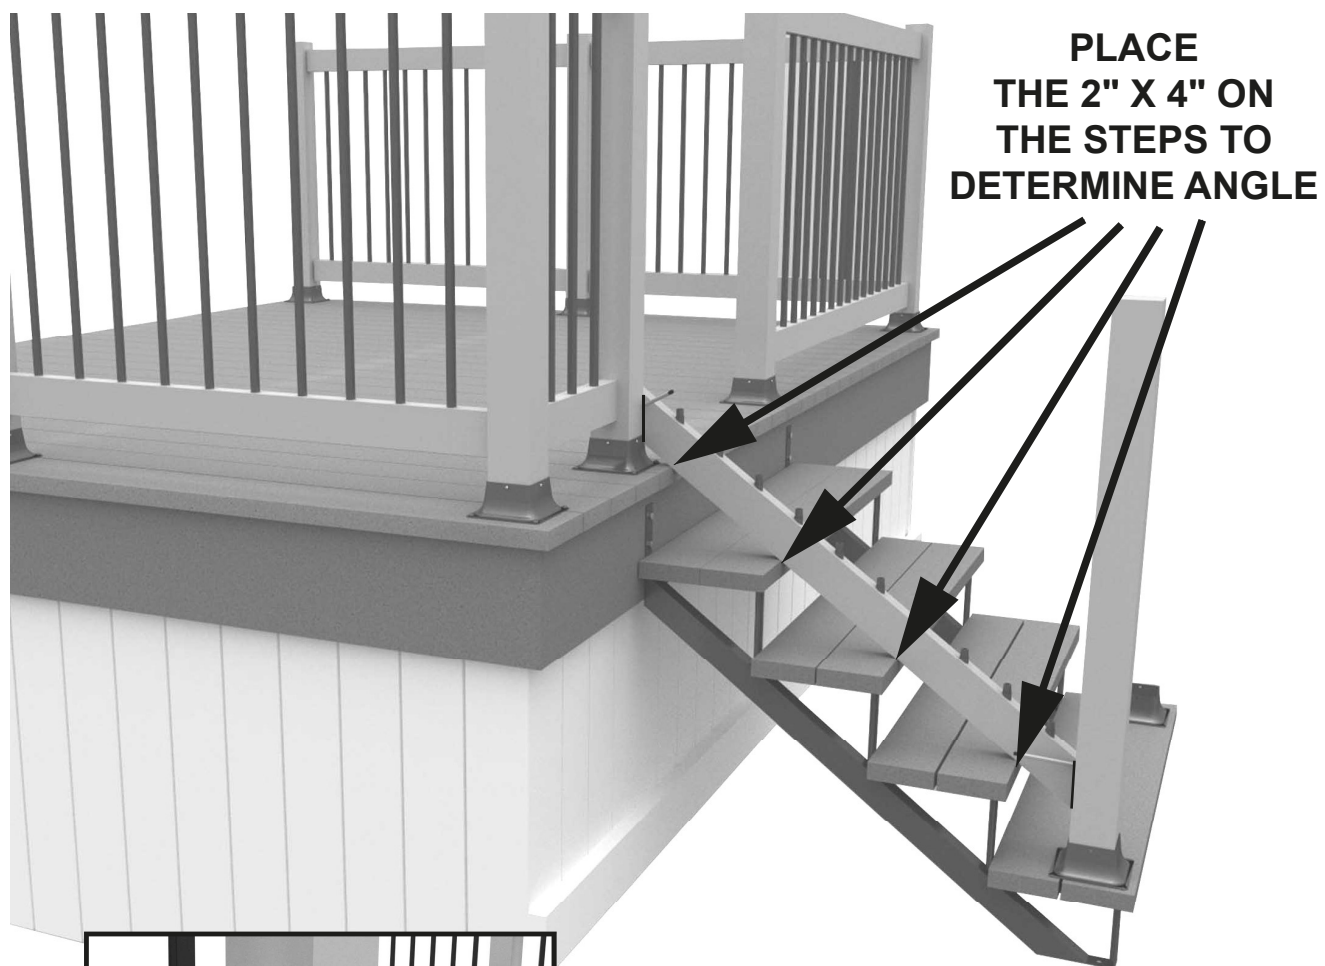

**LEAN THE RAILING AGAINST
THE POSTS AS ILLUSTRATED**

DRAW AND CUT ALONG THE LINE

FIX THE LOWER STAIR RAILING TO THE POSTS **1**

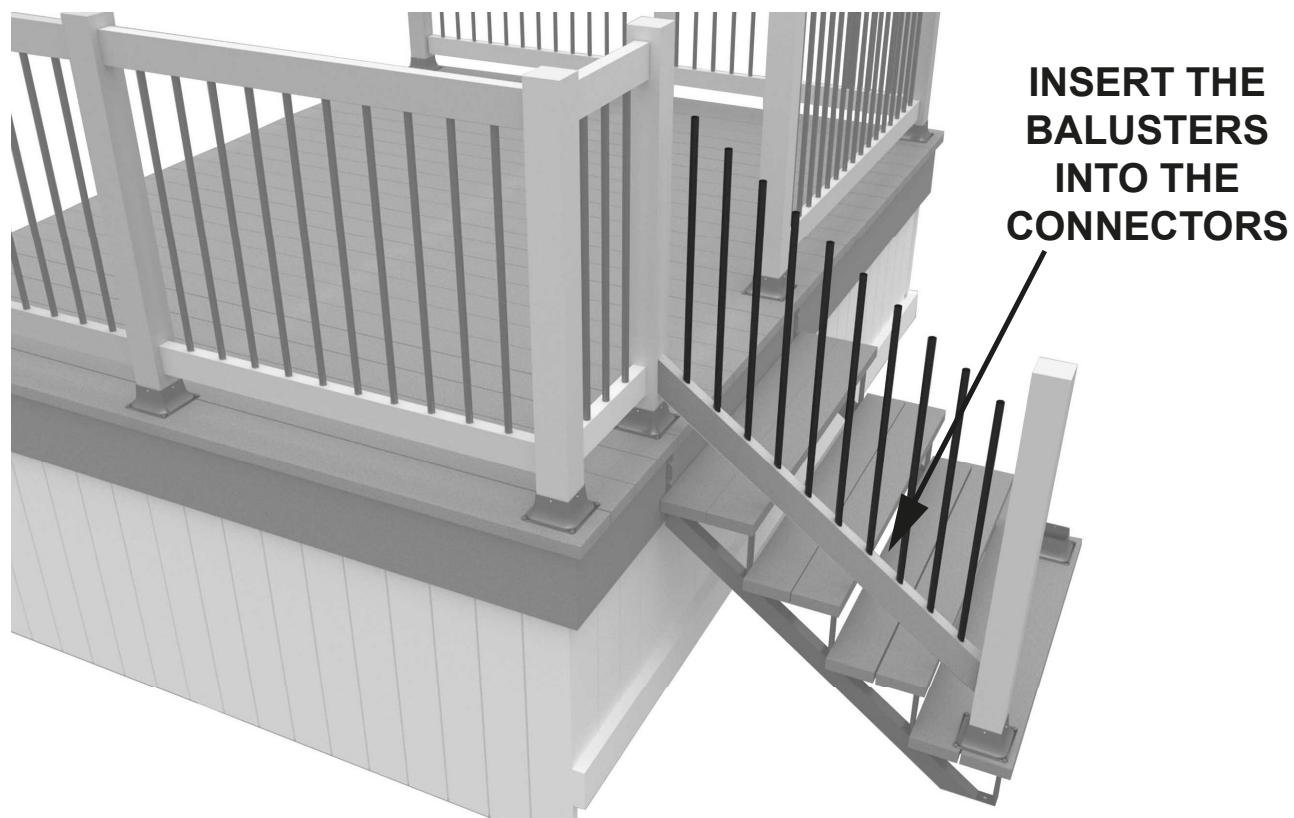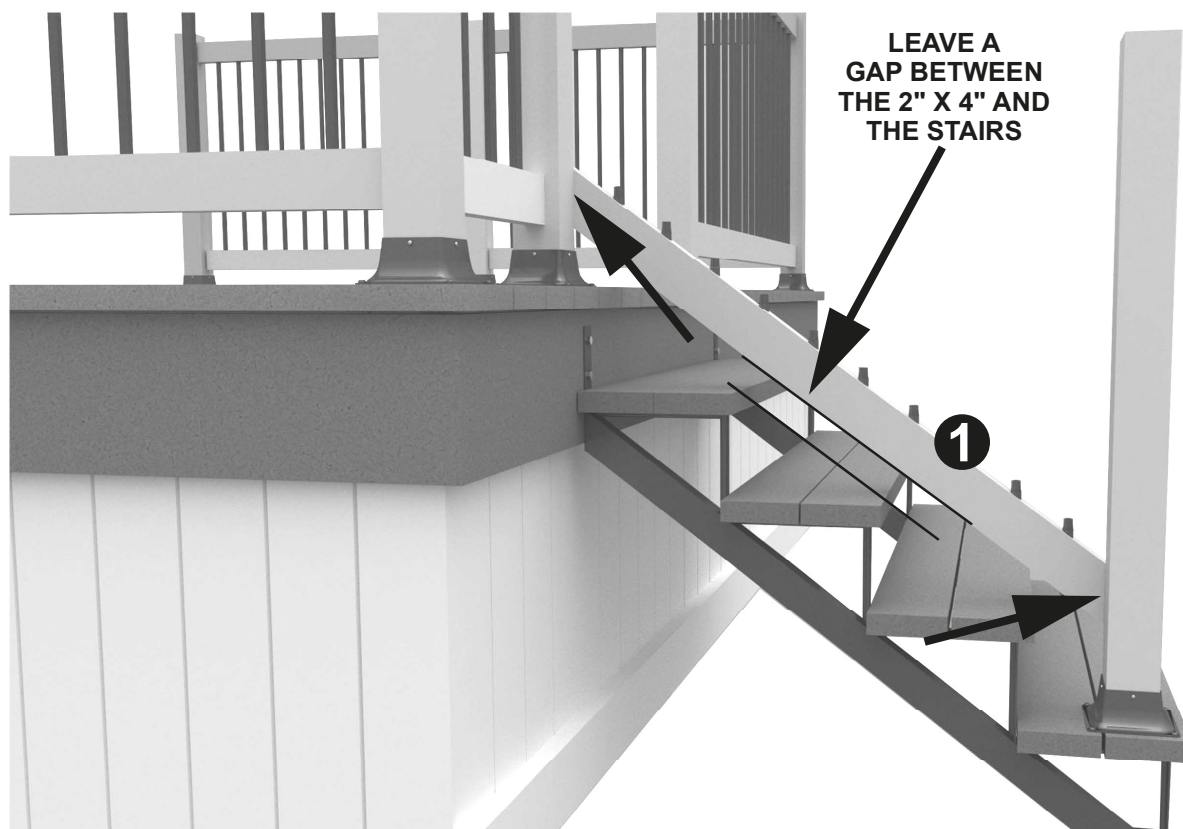


STEP 8 - INSTALLATION ON STAIR HANDRAIL





INSTALL THE
2" X 4" ON THE
BALUSTERS

2

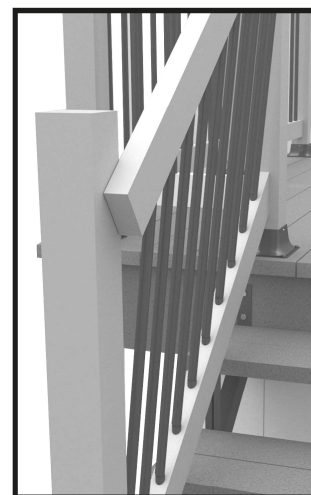


LEAN THE 2" X 4"
AGAINST
THE POSTS.

ADJUST THE RAILING SO THAT THE BALUSTERS ARE STRAIGHT
BY MOVING THE RAILING FROM LEFT TO RIGHT.

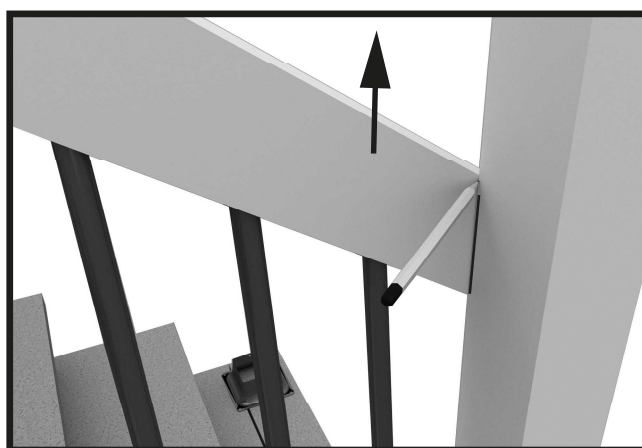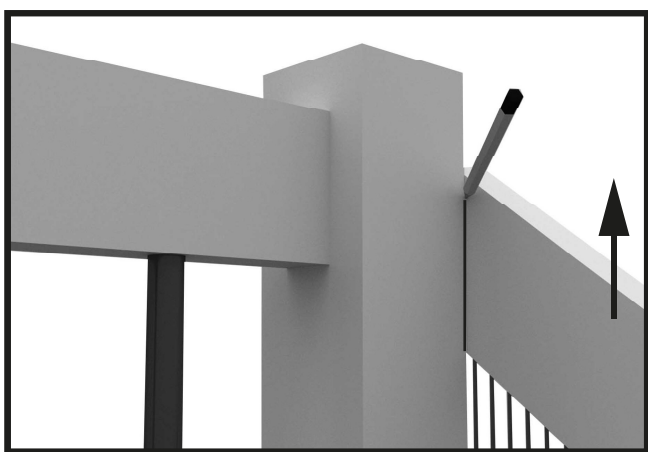

DRAW A LINE, REMOVE THE RAILING AND CUT ALONG THE LINE

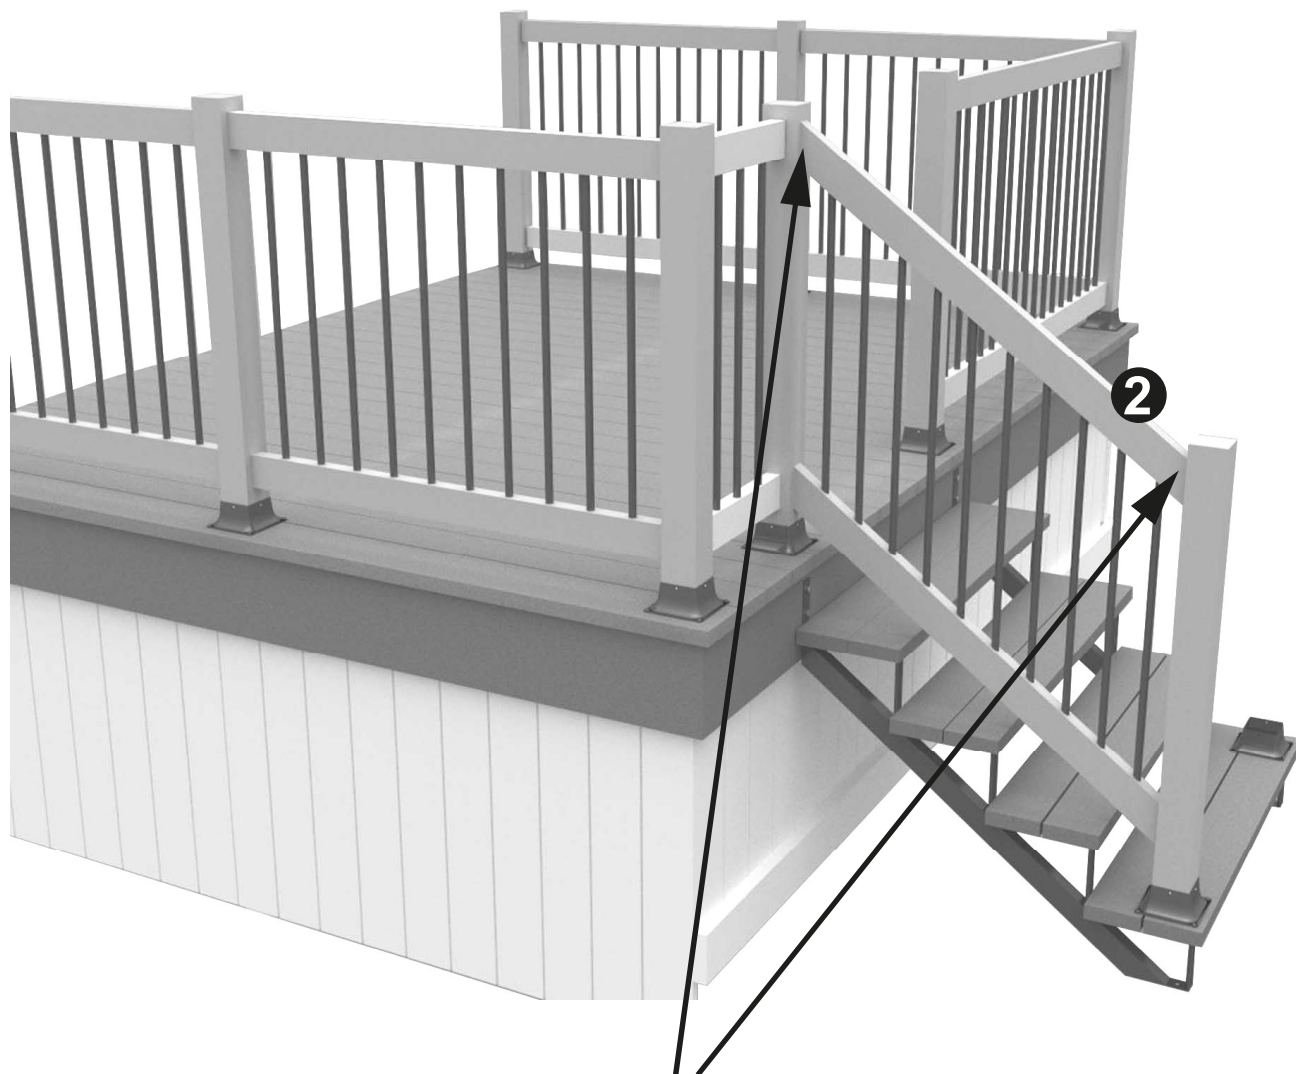

**REINSTALL THE STAIR RAILING
INTO THE ALREADY INSTALLED BALUSTERS ②**

**FIX THE RAILING
TO THE POSTS**

**INSTALLATION TYPES
MAY VARY**

**MAXIMUM DISTANCE
BETWEEN BALUSTERS
IS 3-7/8" (WE USE 3-3/4")**



RATE US!



Satisfied with your Pylex product?

Please let us know by sharing pictures with us at info@pylex.com

You can also write a review online
about your purchase.

(By sending your image, you agree to give Pylex the right to it in its marketing activities).

Thank you !

YOU LIKED OUR PRODUCT?

Visit our website: www.pylex.com to see all our products
or scan this QR code to have access to our catalog!



Pylex Guarantee Certificate



Follow us on:

