

Here is the most  
up-to-date version  
of the installation  
**VIDEO**



Here is the most  
up-to-date version  
of the installation  
**GUIDE**



## **INSTALLATION GUIDE**



# **SQUARE BALUSTRES 26" - 32" - 36"**

**# 17226-27-32-33-36-37**



### **Got a question? - Contact us:**


First contact our friendly customer service team for assistance.

Email: [info@pylex.com](mailto:info@pylex.com) or phone: 1-800-264-1881

Monday to Friday: 8:30 am to 4:30 pm (EST)

Replacement for damaged or missing parts will be shipped promptly.

Rev.: 52-0529




**DECK AND FENCE HARDWARE**  
**WWW.PYLEX.COM / 1 800-264-1881**


**NOTE: FOR STAIR RAILING, PRODUCT #17262 IS REQUIRED AND NOT INCLUDED.**

## MATERIALS and TOOLS REQUIRED

17226 - 17232 - 17236

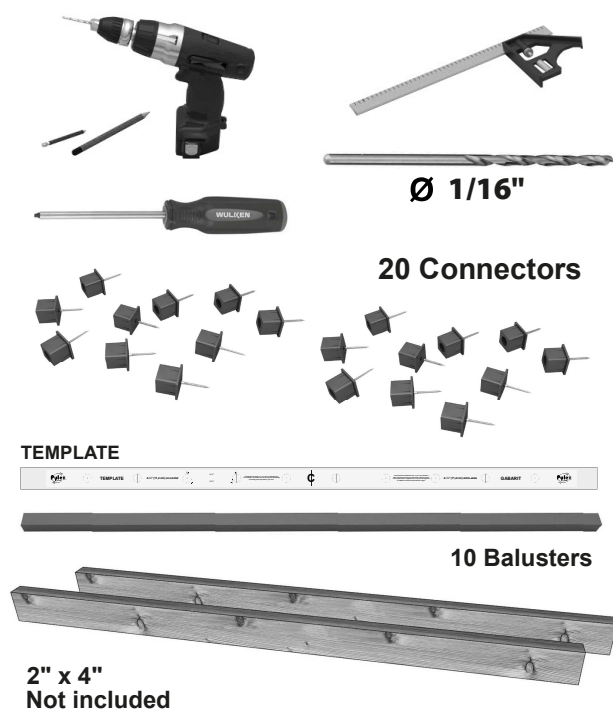

17227 - 17233 - 17237

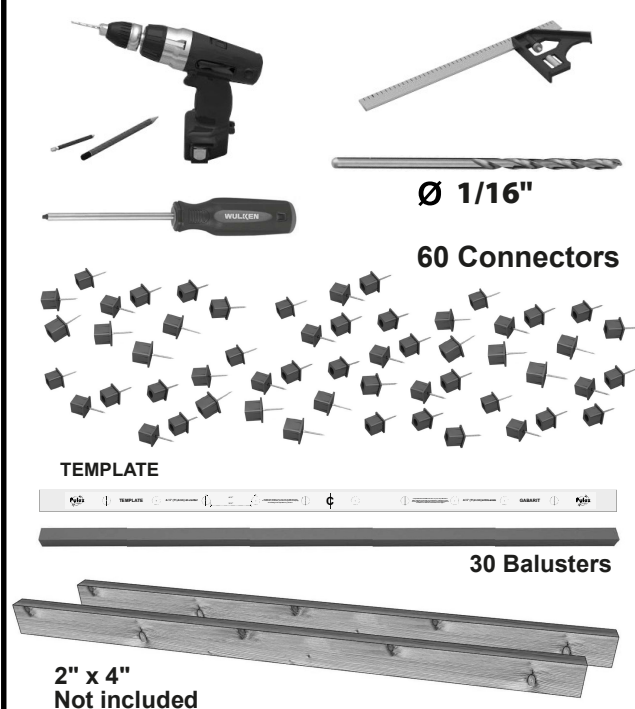

## NUMBER OF BALUSTERS REQUIRED




DISTANCE		BALUSTERS
FROM	TO	
75- <sup>3</sup> / <sub>4</sub> "	71- <sup>1</sup> / <sub>2</sub> "	16
71- <sup>1</sup> / <sub>4</sub> "	67"	15
66- <sup>3</sup> / <sub>4</sub> "	62- <sup>1</sup> / <sub>2</sub> "	14
62- <sup>1</sup> / <sub>4</sub> "	58"	13
57- <sup>3</sup> / <sub>4</sub> "	53- <sup>1</sup> / <sub>2</sub> "	12
53- <sup>1</sup> / <sub>4</sub> "	49"	11
48- <sup>3</sup> / <sub>4</sub> "	44- <sup>1</sup> / <sub>2</sub> "	10
44- <sup>1</sup> / <sub>4</sub> "	40"	9

DISTANCE		BALUSTERS
FROM	TO	
39- <sup>3</sup> / <sub>4</sub> "	35- <sup>1</sup> / <sub>2</sub> "	8
35- <sup>1</sup> / <sub>4</sub> "	31"	7
30- <sup>3</sup> / <sub>4</sub> "	26- <sup>1</sup> / <sub>2</sub> "	6
26- <sup>1</sup> / <sub>4</sub> "	22"	5
21- <sup>3</sup> / <sub>4</sub> "	17- <sup>1</sup> / <sub>2</sub> "	4
17- <sup>1</sup> / <sub>4</sub> "	13"	3
12- <sup>3</sup> / <sub>4</sub> "	8- <sup>1</sup> / <sub>2</sub> "	2
8- <sup>1</sup> / <sub>4</sub> "	4"	1

## STEP 1 - INSTALLATION ON THE RAILING



MEASURE THE DISTANCE  
BETWEEN POSTS

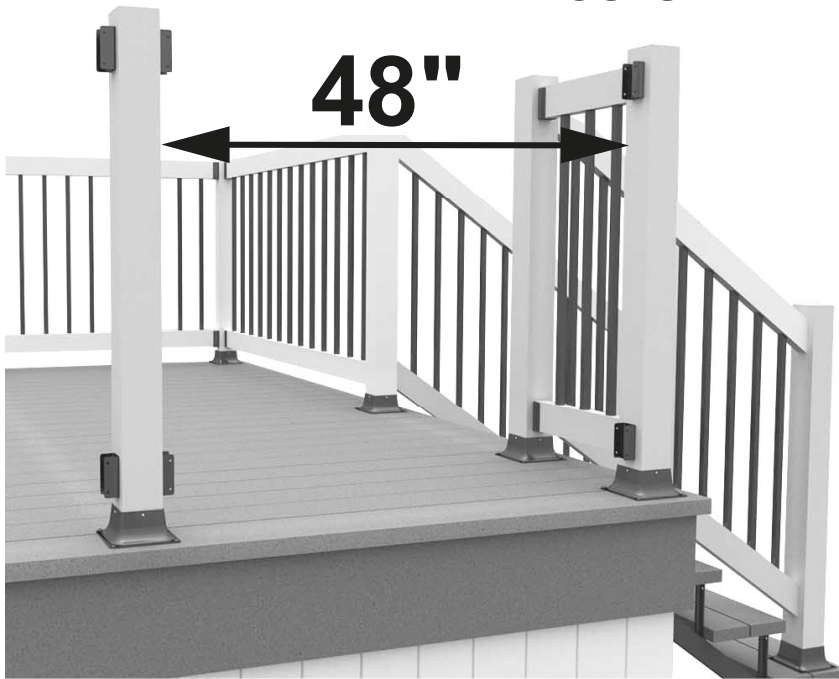


48"\*  
10 balusters

USE TWO 2" X 4" PIECES LONGER THAN  
THE FINAL MEASUREMENT (50")\*




Ø 1/16"

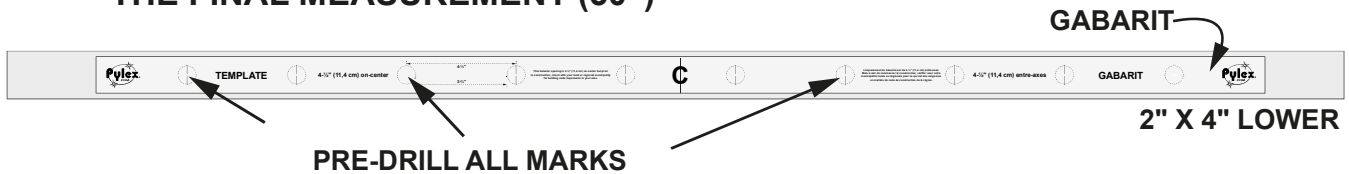

1

PRE-DRILL ALL MARKS

2" X 4" LOWER



2

2" X 4" TOP


USE A SQUARE TO DRAW A  
LINE ON THE TOP 2" X 4"



1

2

PRE-DRILL ALL MARKS ON THE  
TOP 2" X 4"

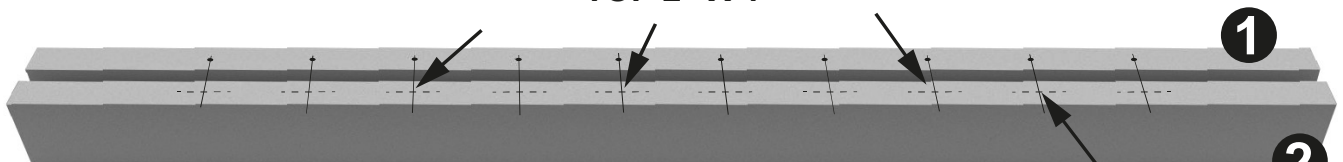


1

2



MARK THE CENTER

\*USE YOUR MEASUREMENTS

## STEP 2 - INSTALLATION ON THE RAILING




**SCREW THE CONNECTORS  
INTO THE PRE-DRILLED HOLES**

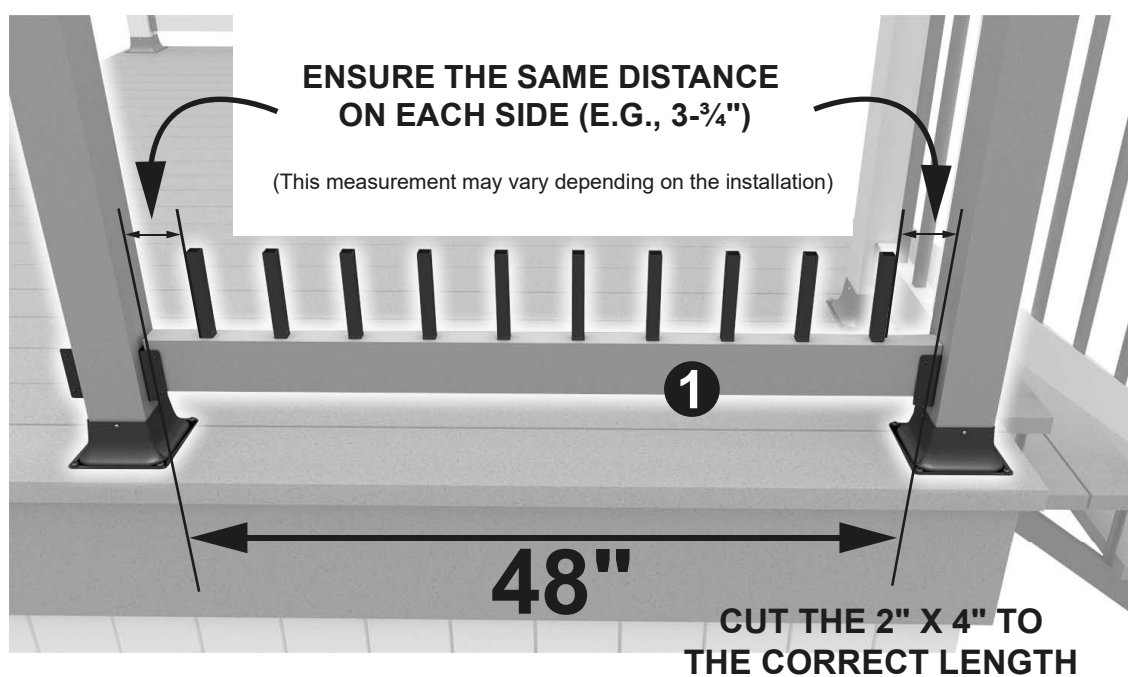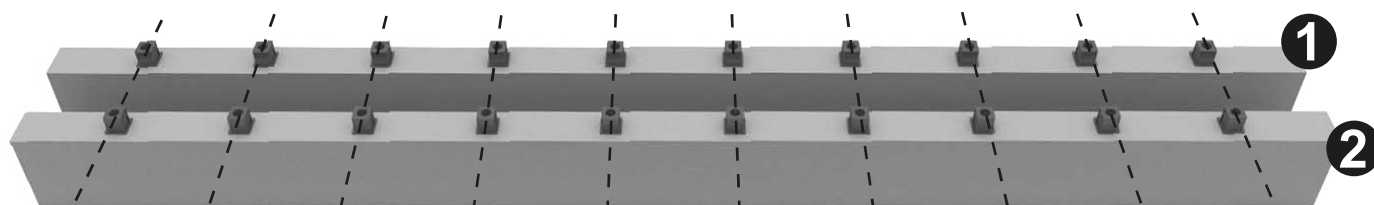

### STEP 3 - INSTALLATION ON THE RAILING




ASSEMBLE THE BALUSTERS AS SHOWN

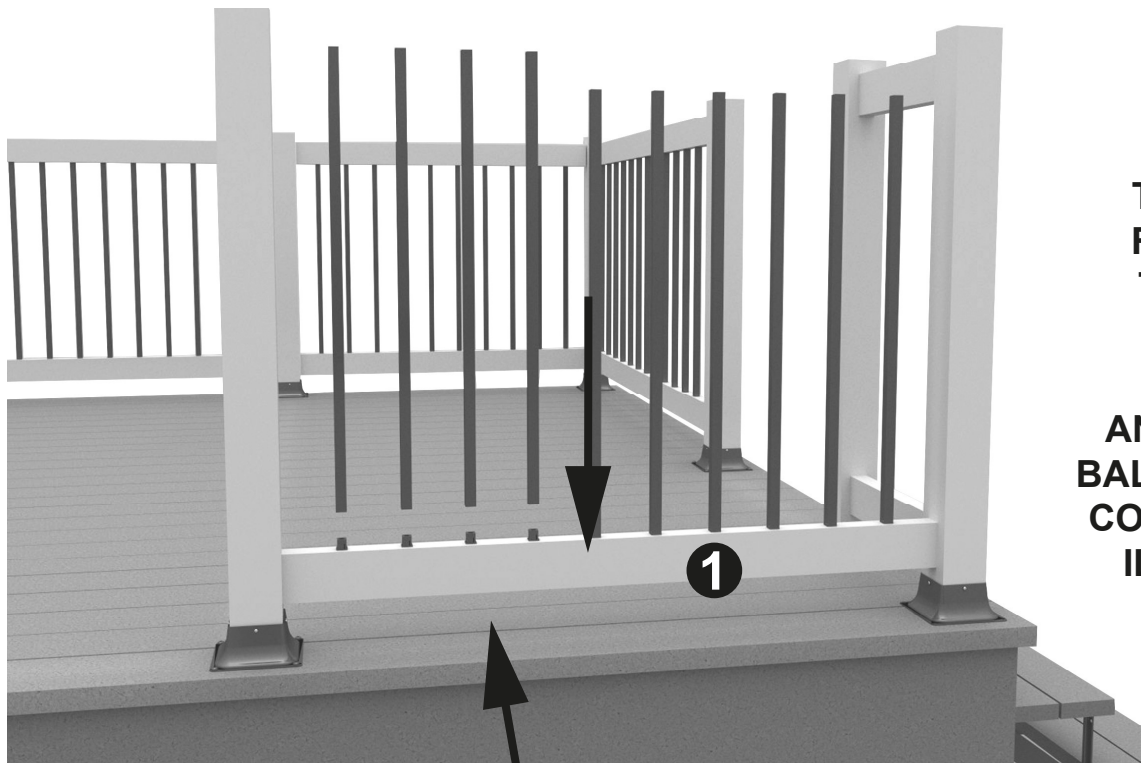

FIX  
THE LOWER  
RAILING TO  
THE POSTS

AND PLACE THE  
BALUSTERS IN THE  
CONNECTORS AS  
ILLUSTRATED.

1

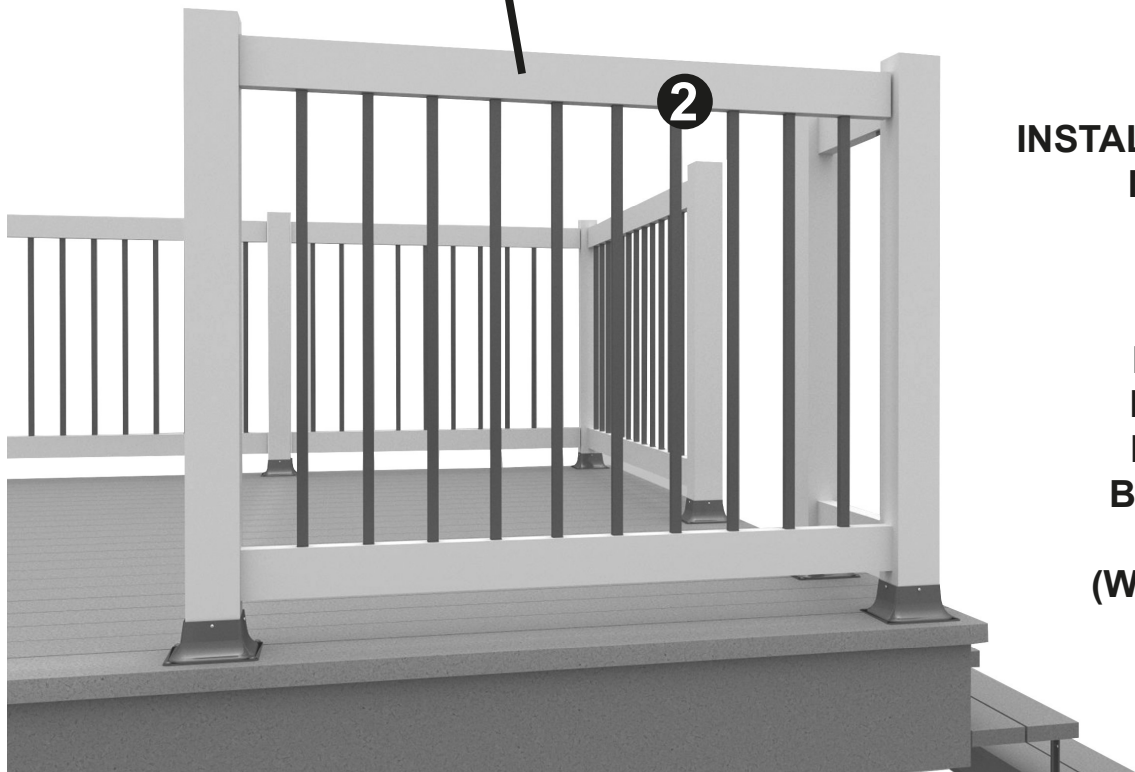

INSTALLATION TYPES  
MAY VARY



MAXIMUM  
DISTANCE  
BETWEEN  
BALUSTERS  
IS 3- $\frac{7}{8}$ "  
(WE USE 3- $\frac{3}{4}$ " )

2 INSTALL THE UPPER RAILING INTO  
THE ALREADY INSTALLED BALUSTERS

FIX THE  
RAILING TO  
THE POSTS




## STEP 4 - INSTALLATION ON STAIR HANDRAIL

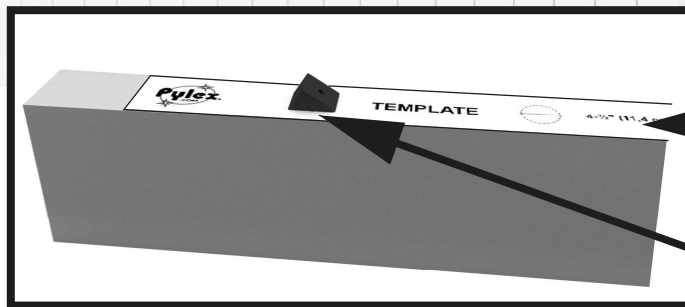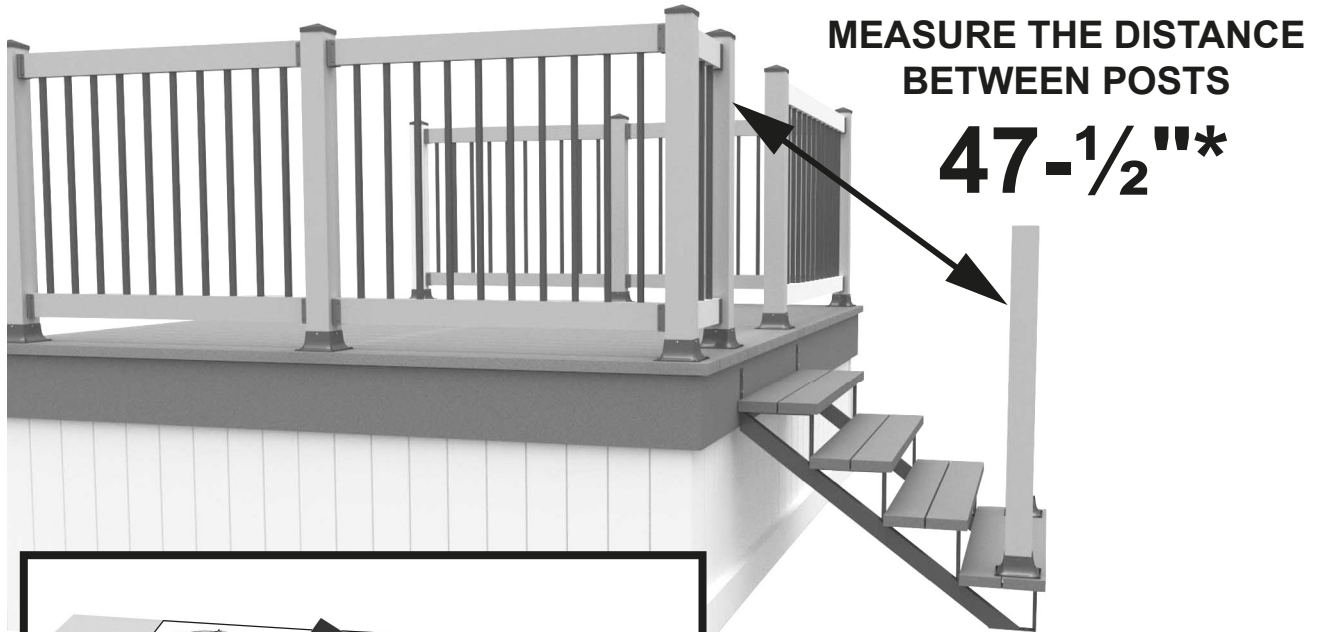


TEMPLATE

PLACE THE CONNECTORS  
IN THE CENTER OF THE MARKS

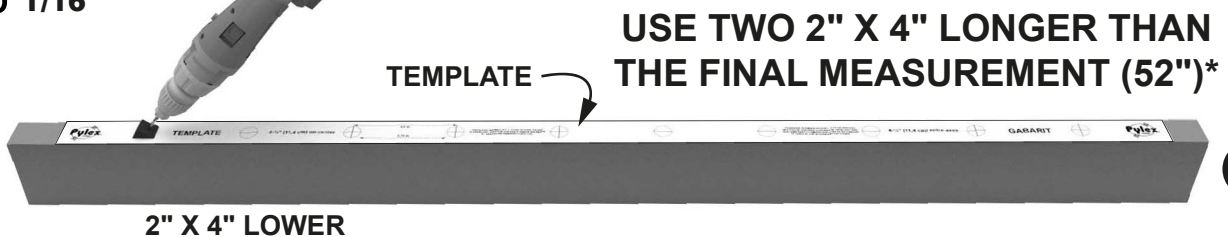


1

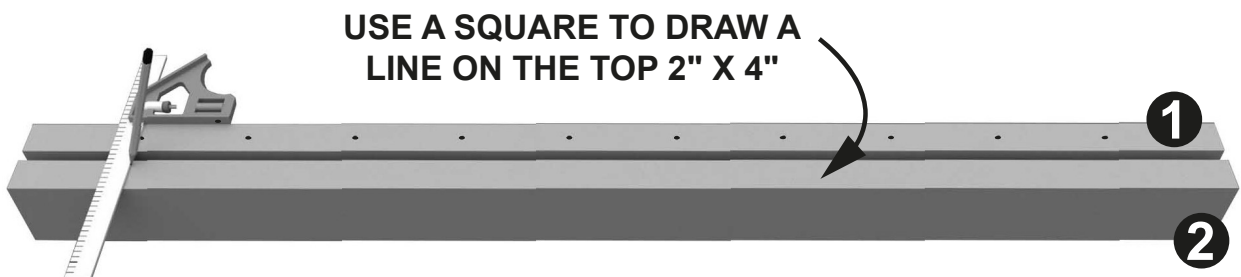

1

2

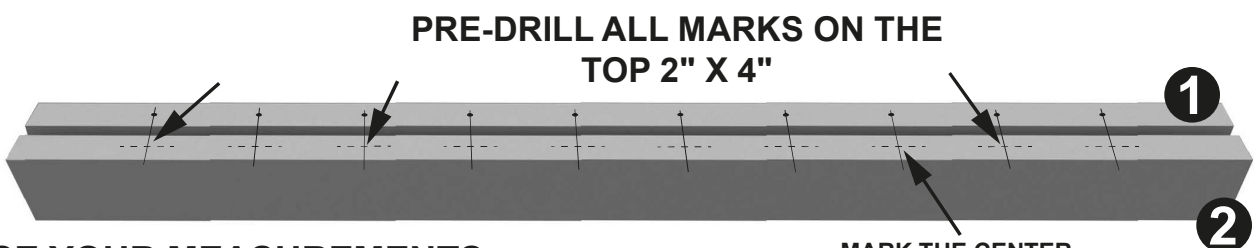


1

2

\*USE YOUR MEASUREMENTS

MARK THE CENTER

## STEP 5 - INSTALLATION ON STAIR HANDRAIL

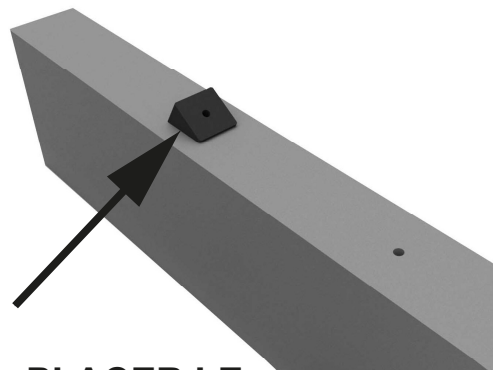


PLACER LE  
CONNECTEUR  
AU CENTRE  
DES TROUS


CONNECTORS




No 2

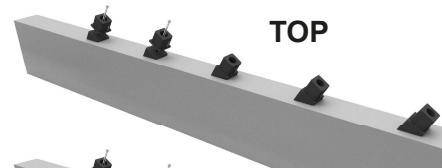


TOP

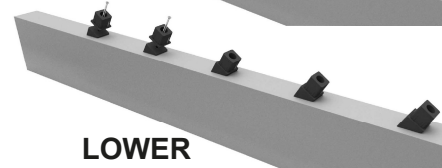

LOWER



PRODUCT #17262 IS  
REQUIRED  
(SOLD SEPARATELY)

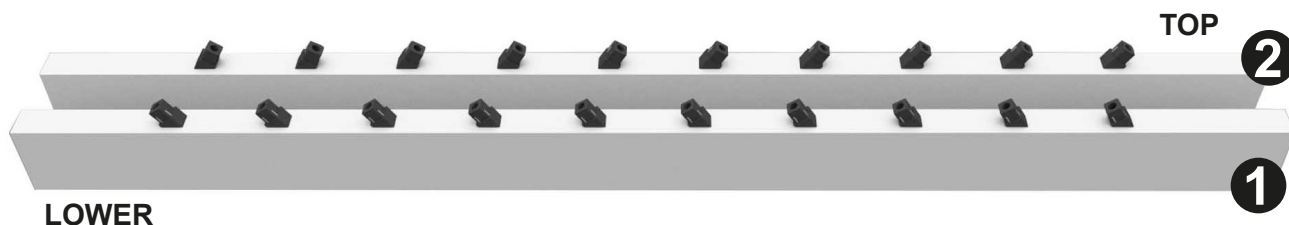


TOP

2

LOWER

1

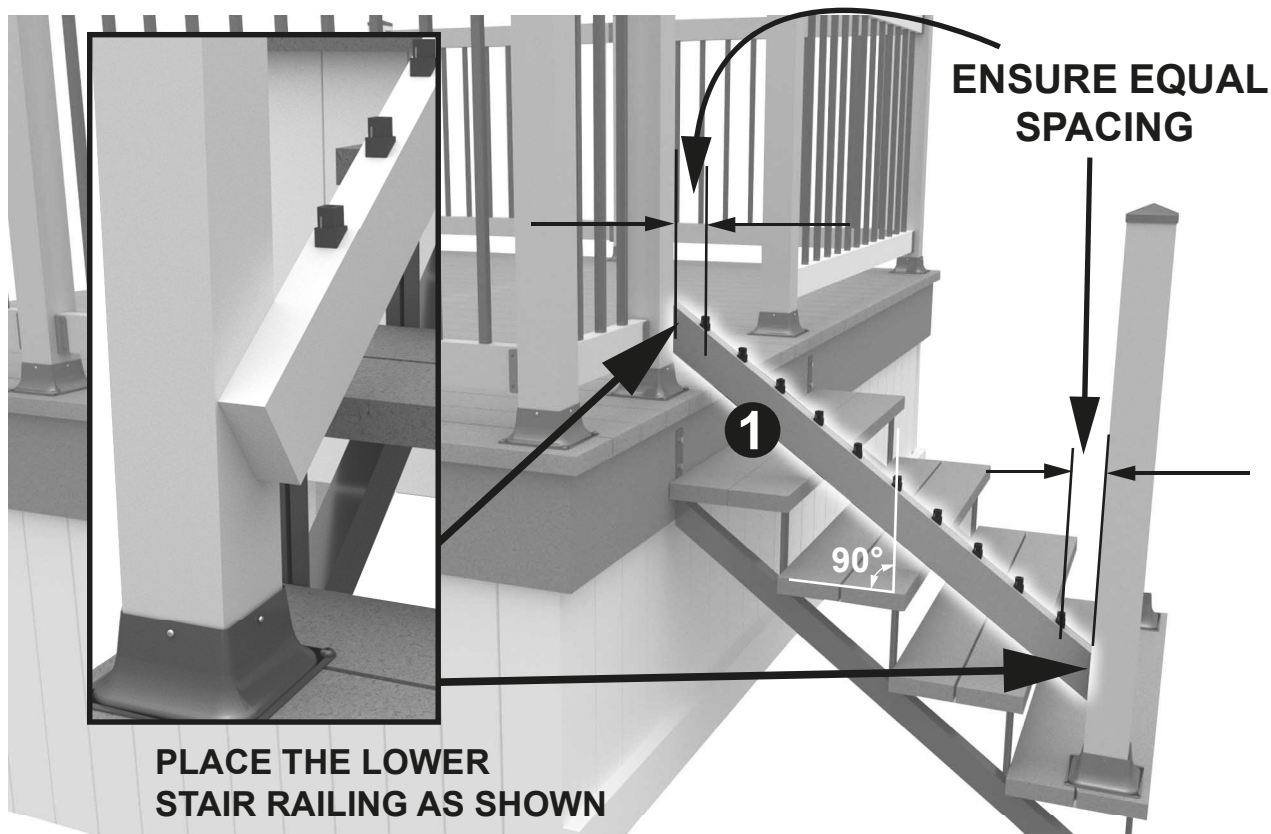

ENSURE EQUAL  
SPACING

1




90°

PLACE THE LOWER  
STAIR RAILING AS SHOWN

## STEP 6 - INSTALLATION ON STAIR HANDRAIL



PLACE THE 2" X 4" ON  
THE STEPS TO  
DETERMINE ANGLE

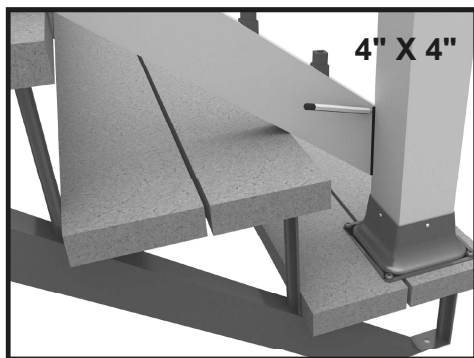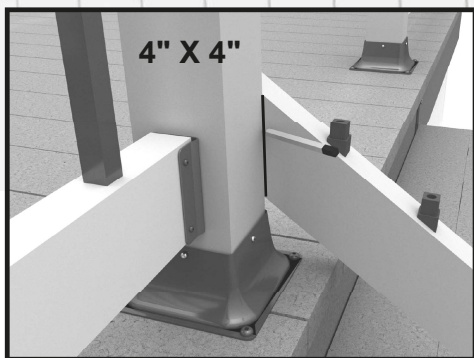
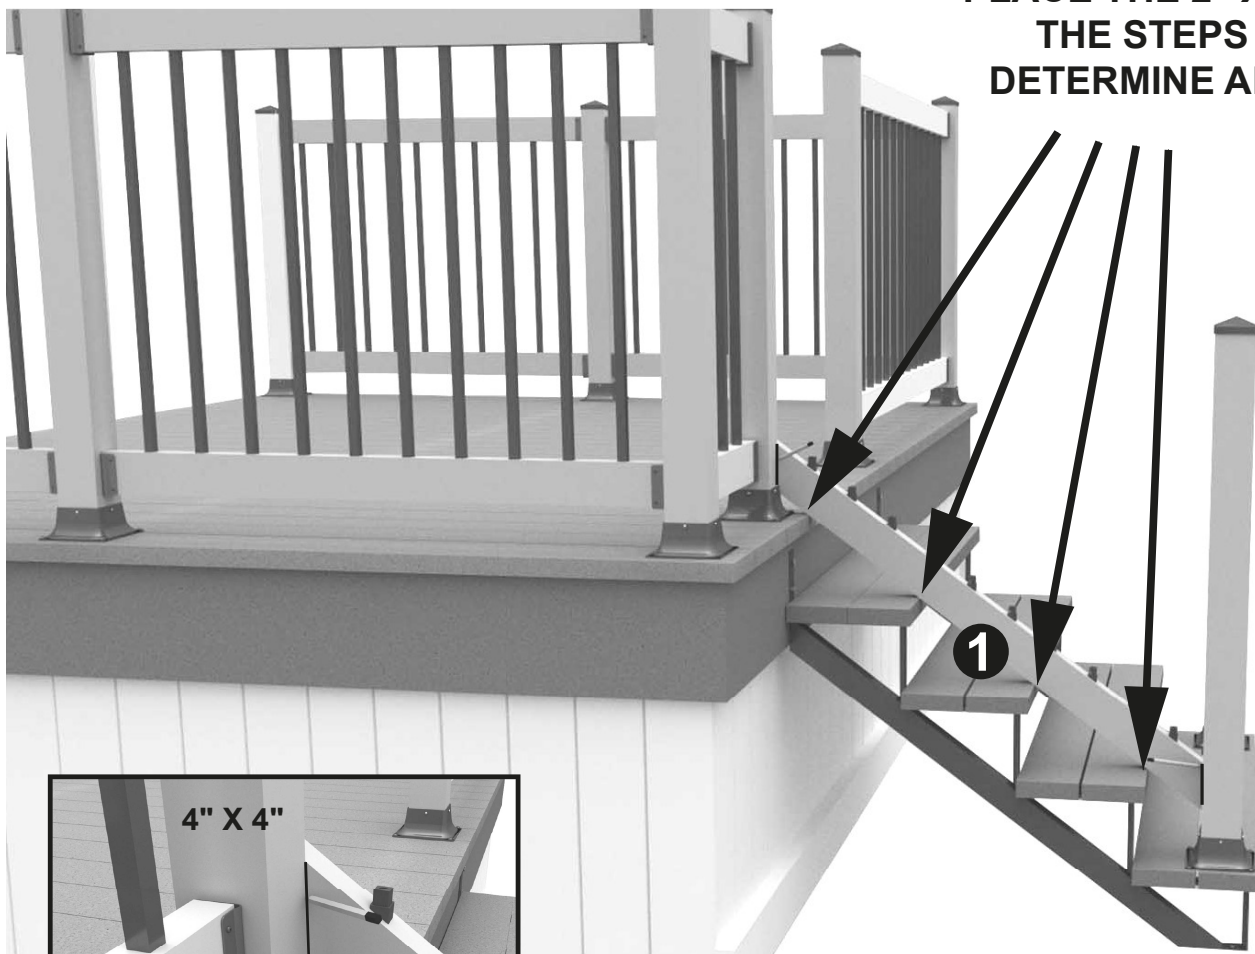


LEAN THE  
RAILING AGAINST  
THE POSTS  
AS ILLUSTRATED


DRAW AND CUT ALONG THE LINE





**FIX THE LOWER STAIR RAILING TO THE POSTS 1**

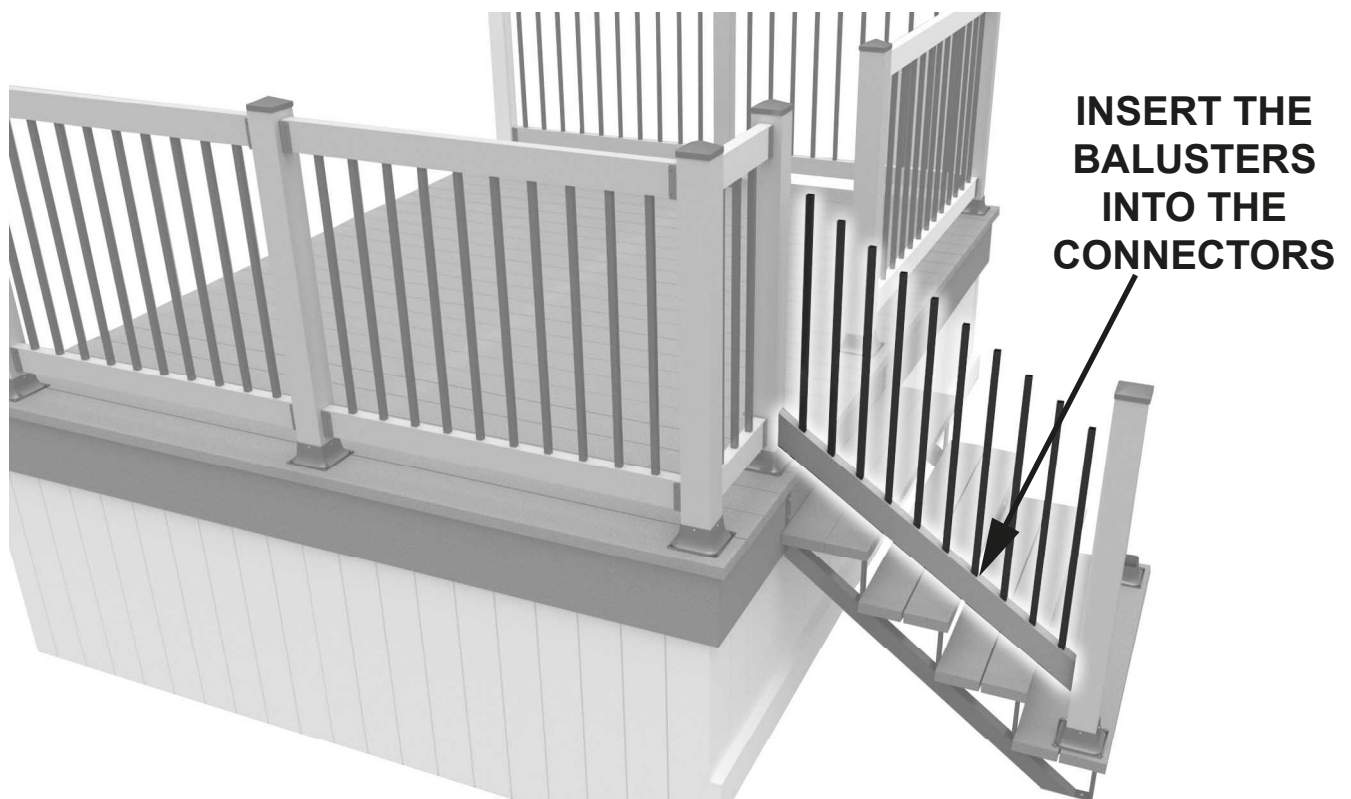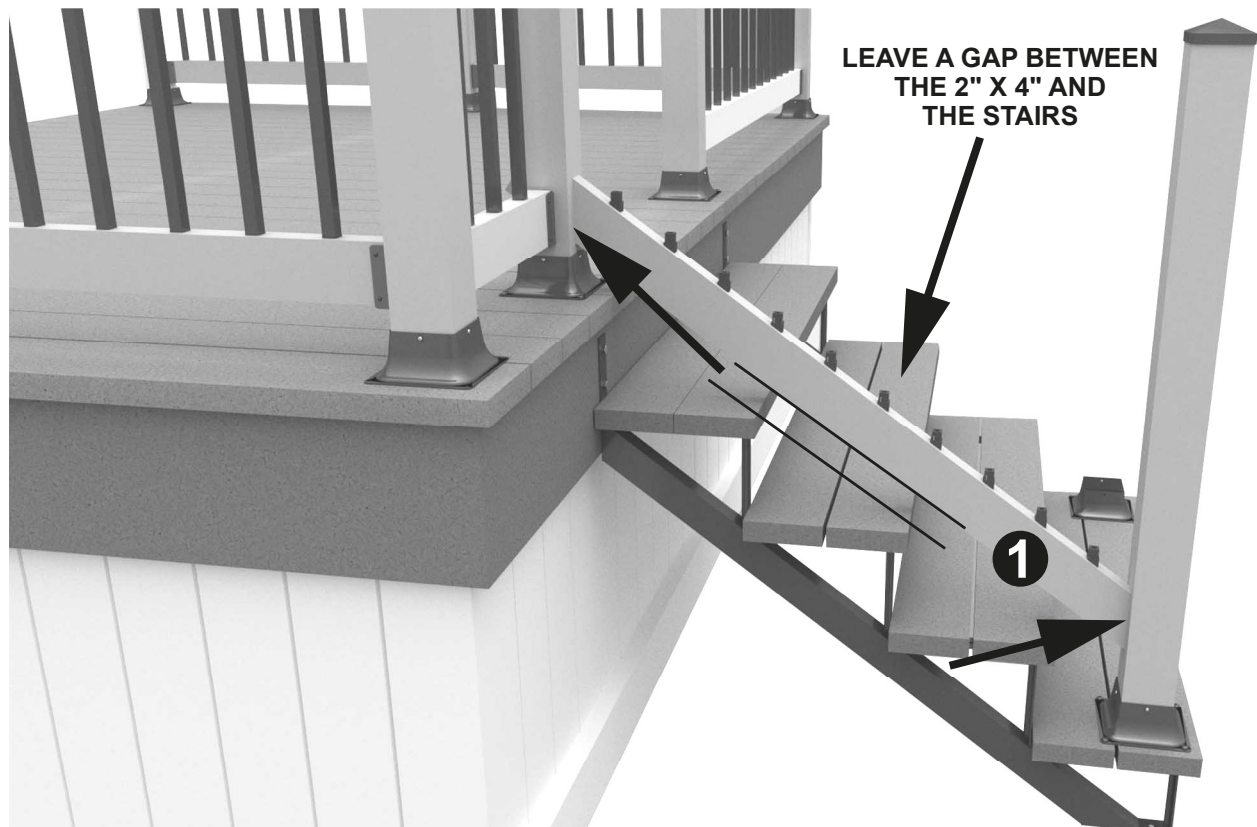


## STEP 8 - INSTALLATION ON STAIR HANDRAIL

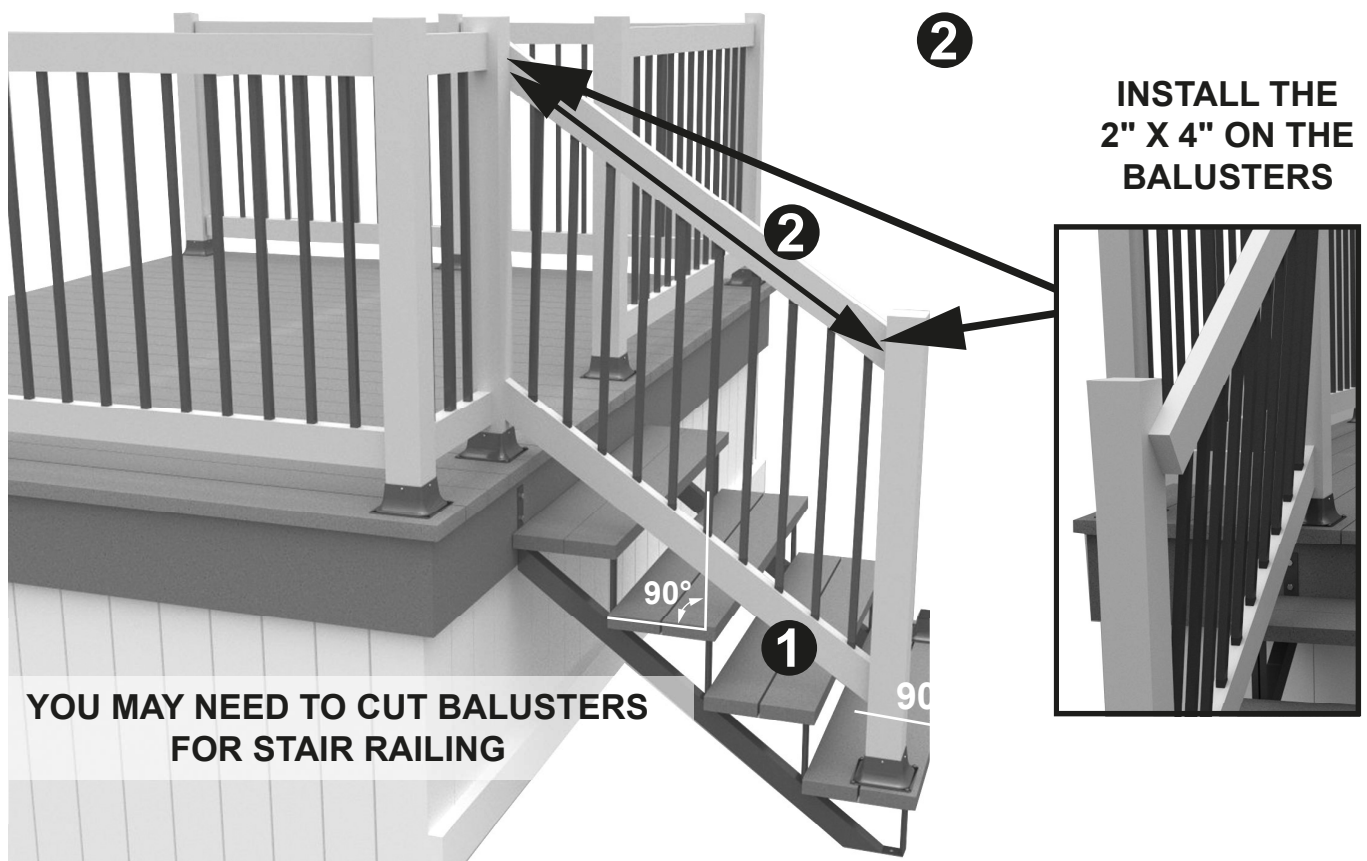

**ADJUST THE RAILING SO THAT THE BALUSTERS ARE STRAIGHT BY MOVING THE RAILING FROM LEFT TO RIGHT.**

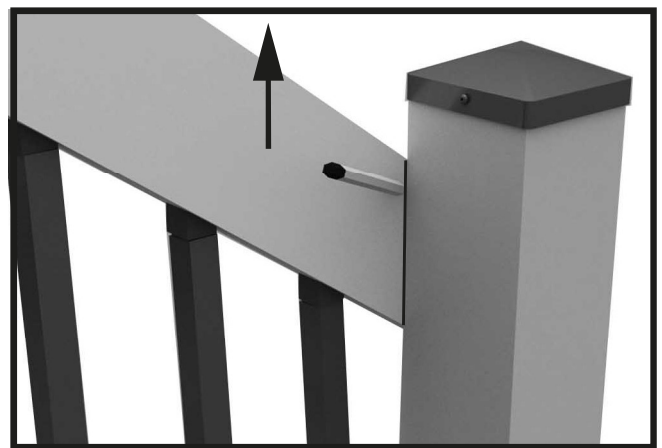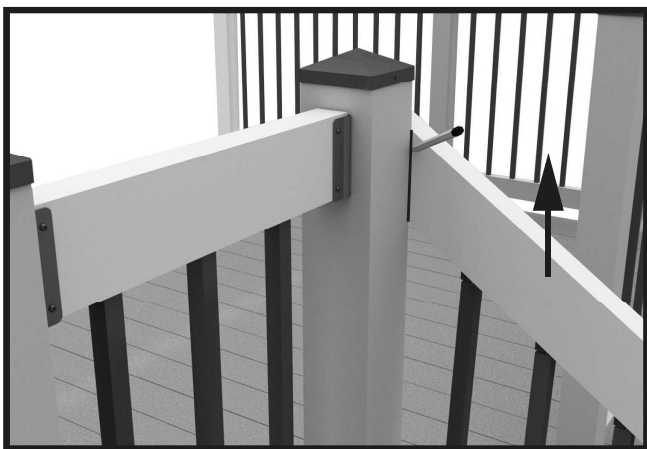

**DRAW A LINE, REMOVE THE RAILING AND CUT ALONG THE LINE**

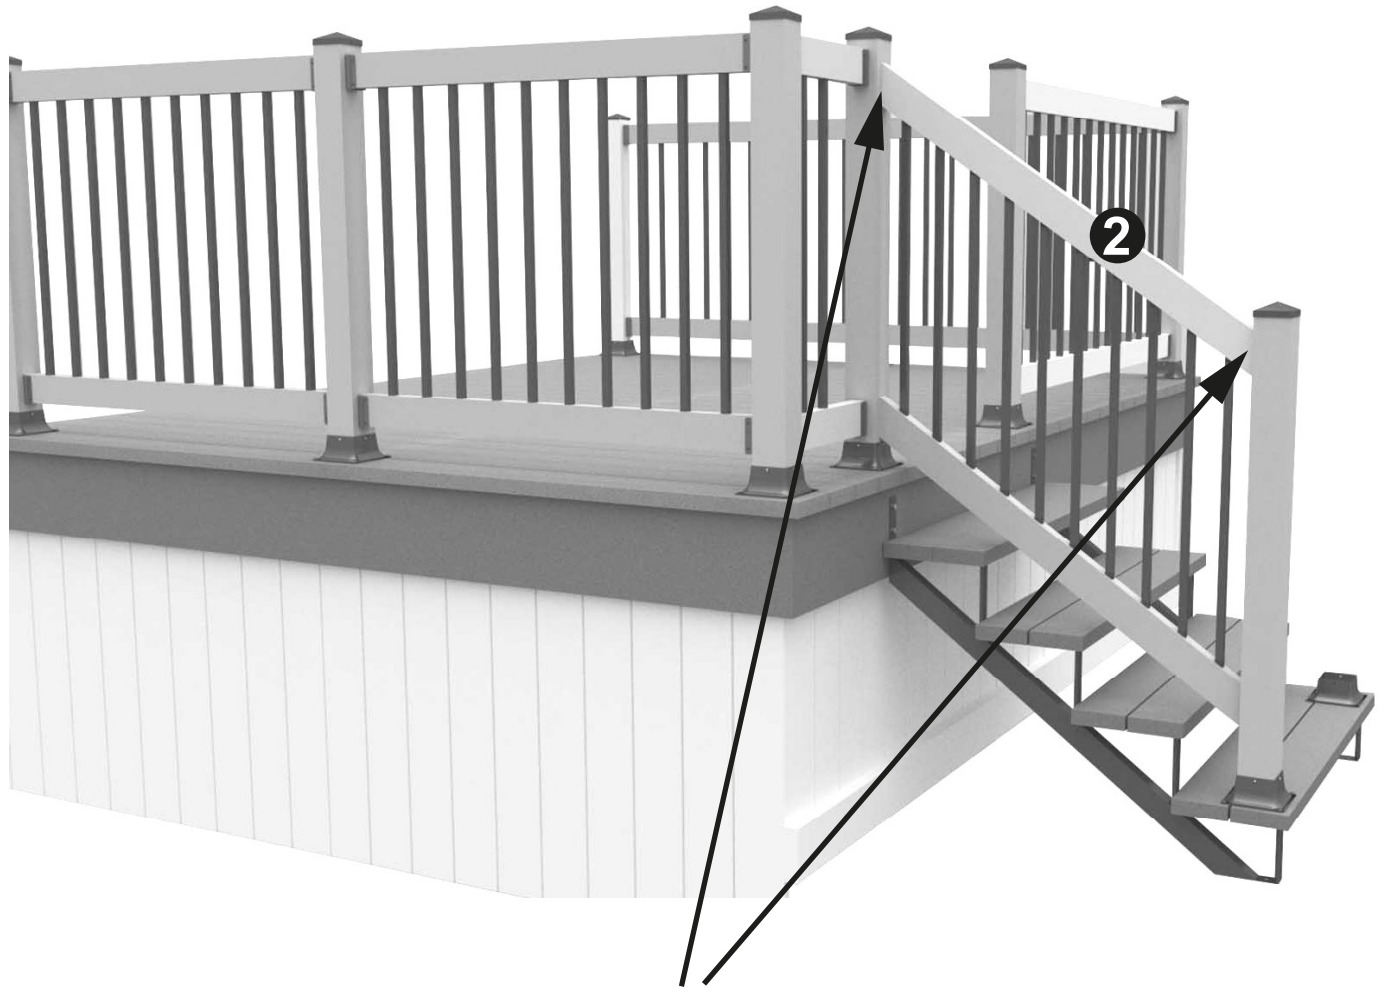

**REINSTALL THE STAIR RAILING  
INTO THE ALREADY INSTALLED BALUSTERS**

**2**

**FIX THE RAILING  
TO THE POSTS**

**INSTALLATION TYPES  
MAY VARY**

**MAXIMUM DISTANCE  
BETWEEN BALUSTERS  
IS 3-<sup>7</sup>/<sub>8</sub>" (WE USE 3-<sup>3</sup>/<sub>4</sub>" )**



## RATE US!



### Satisfied with your Pylex product?

Please let us know by sharing pictures with us at [info@pylex.com](mailto:info@pylex.com)

You can also write a review online  
about your purchase.

*(By sending your image, you agree to give Pylex the right to it in its marketing activities).*

*Thank you !*

---

### YOU LIKED OUR PRODUCT?

Visit our website: [www.pylex.com](http://www.pylex.com) to see all our products  
or scan this QR code to have access to our catalog!



### Pylex Guarantee Certificate



Follow us on:

